


UXE-OW24

Example connection diagram

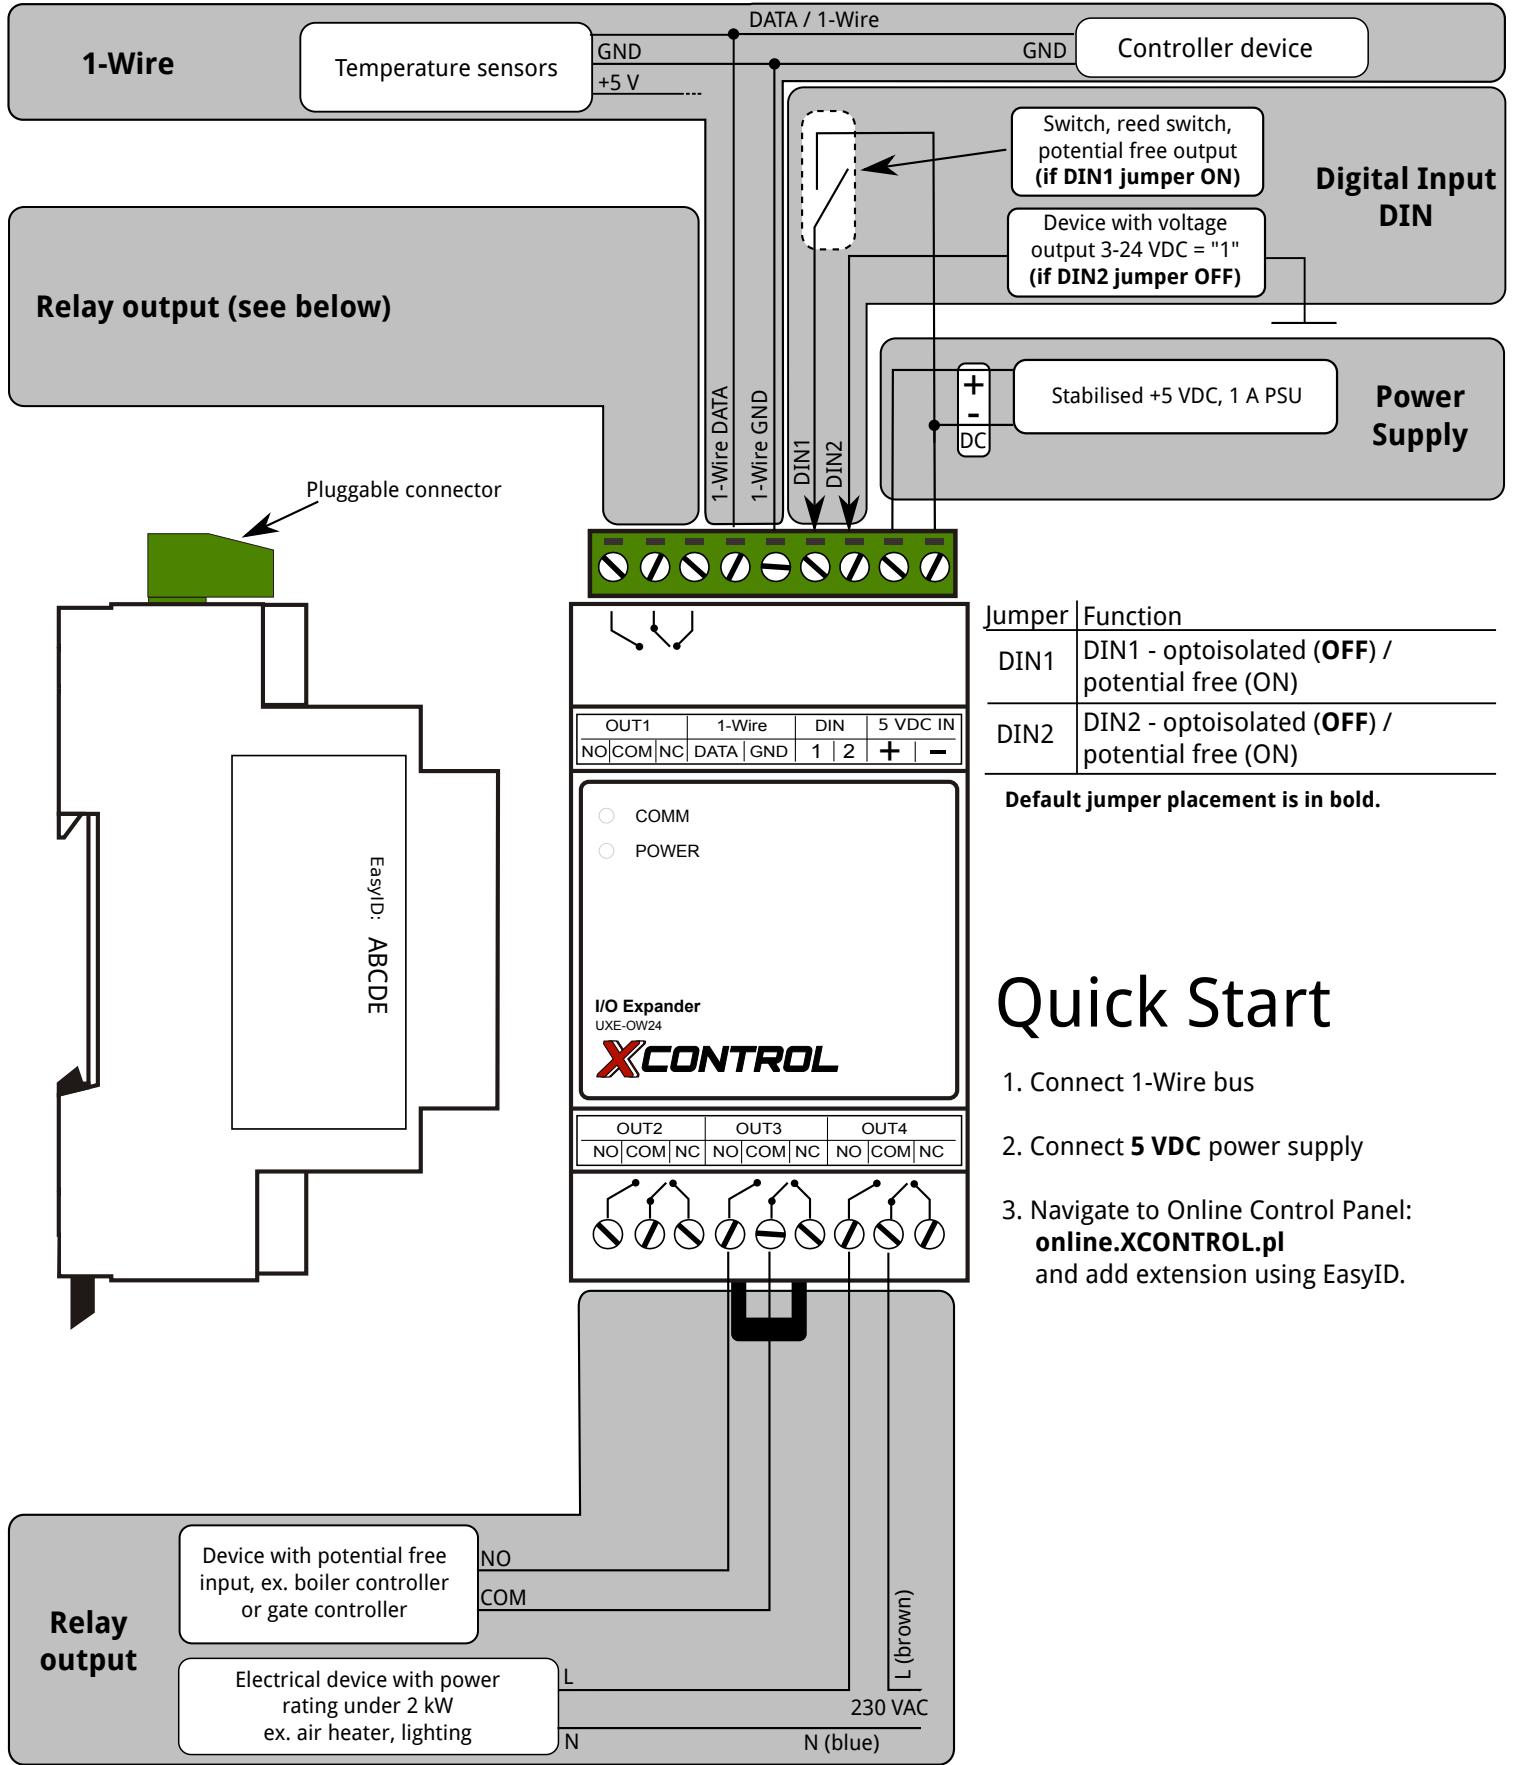

Jumper	Function
DIN1	DIN1 - optoisolated (OFF) / potential free (ON)
DIN2	DIN2 - optoisolated (OFF) / potential free (ON)

Default jumper placement is in bold.

Quick Start

1. Connect 1-Wire bus
2. Connect **5 VDC** power supply
3. Navigate to Online Control Panel: **online.XCONTROL.pl** and add extension using EasyID.

Hardware Serial number

EasyID Registration Code